
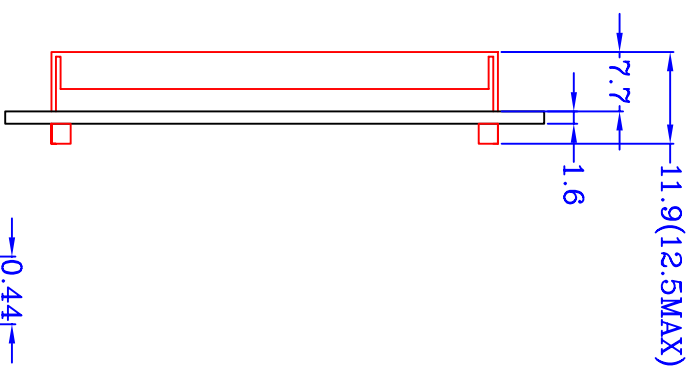


1	FG	Frame ground
2	VSS	Power ground
3	VDD	Power supply (+5V)
4	V0	Contrast adjust
5	/WR	Write signal
6	/RD	Read signal
7	/CE	Chip select
8	C/D	H: Command; L:Data
9	/RST	Reset signal
10	DB0	DATA BUS 0
11	DB1	DATA BUS 1
12	DB2	DATA BUS 2
13	DB3	DATA BUS 3
14	DB4	DATA BUS 4
15	DB5	DATA BUS 5
16	DB6	DATA BUS 6
17	DB7	DATA BUS 7
18	FS	Font type. L:8X8; H:6X8
19	K	Backlight (-)
20	A	Backlight (+) +5V

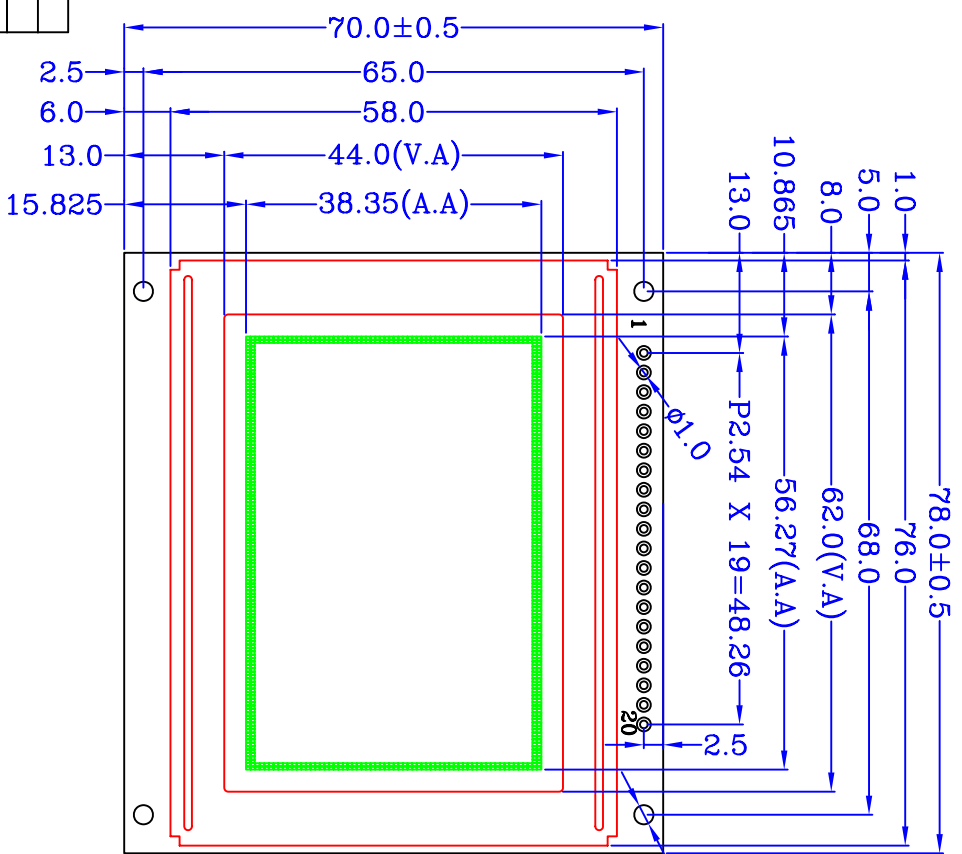

- NOTES:
1. DISPLAY TYPE: STN, YELLOW-GREEN
  2. POLARIZER TYPE: TRANSPARENT, POSITIVE
  3. VIEW DIRECTION: 6:00
  4. OPERATING TEMPERATURE: -20°C~+70°C
  5. STORAGE TEMPERATURE: -30°C~+80°C
  6. VDD: +5V
  7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
  8. CONTROLLER: T6963C
  9. BACKLIGHT TYPE: YELLOW-GREEN, BOTTOM
  10. BACKLIGHT SUPPLY VOLTAGE: +5.0V
  11. VOP: TBD

<b>WAYING (HONGKONG) SHARES LIMITED</b>		DESIGN:	MODEL NUMBER:	UNITS:	MM
		CHECK:	WYM12864A	VERSION:	A
APPROVE:			SHEET:	1 OF 1	
Unspecified tolerances are ±0.3			DATE:	2005-06-08	