
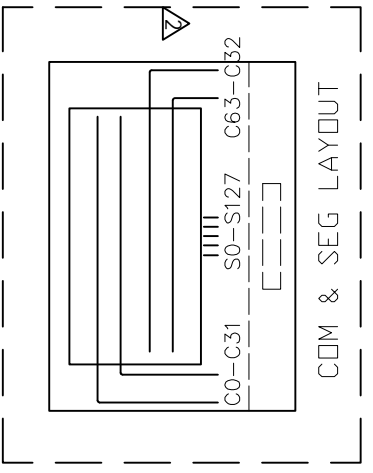

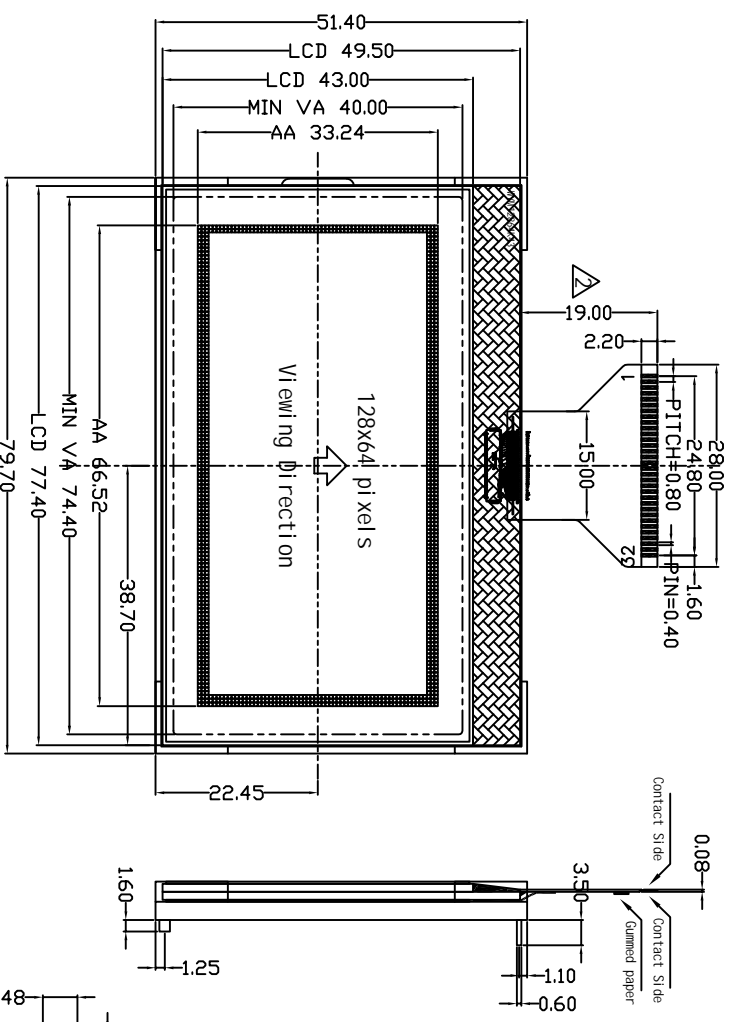


VER	DETAIL DESCRIPTION	DATE
△	The First Amendment	2015-11-13
△	按客户要求修改:FPC 长度, 电压, 逻辑	2015-11-13

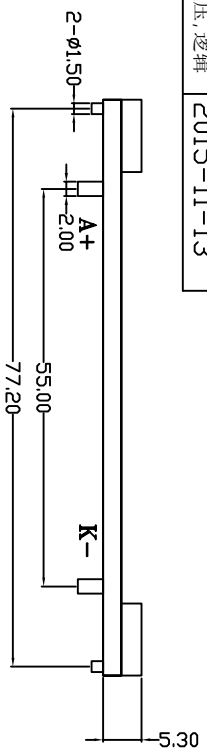

PIN ASSIGNMENT:	Example: 68引脚4倍压	
1	VOUT	11 1UF
2	C3P	1UF
3	C2M	1UF
4	C2P	1UF
5	C1M	1UF
6	C1P	1UF
7	V0	0.1UF
8	V1	0.1UF
9	V2	0.1UF
10	V3	0.1UF
11	V4	0.1UF
12	VREF	0.1UF
13	GND	
14	GND	
15	VDD	
16	VDD	
17-24	DB7-DB0	P1, 7-P1, 0
25	/RD	P3, 4
26	/MR	P3, 3
27	D/C	P3, 2
28	/CS	P3, 1
29	CS6	+3.0V
30	BT4	
31	P/S	+3.0V
32	/RST	P3, 0

ITEM	PARAMETERS	ITEM	PARAMETERS
OPERATING VOLTAGE	3.0V	OPERATING TEMP	-30°C ? 80°C
OPERATING CURRENT	1.0MA	STORAGE TEMP	-35°C ? 85°C
LCD DRIVE VOLTAGE	9.2V	BACKLIGHT	5leds, 3.0-3.1V.
DISPLAY MODE	STN, YELLOW/GREEN, TRANSPARENT	ROHS STANDARD	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
LCD DRIVE METHOD	DDUTY?1/64; BIAS?1/9	CONNECTOR TYPE	FPC
Driver/Controller	RA8816N	OTHER	--
VIEW DIRECTION	6:00 O'CLOCK		

客户确认签名/
Customer signature

WAYING(HONGKONG) SHARES LIMITED	
名称	CDG 工程图
编号	WYM12864K43G
版本	1.0
绘图	PGY
审批	YXS
日期	2015 11 13